



AKSA Power Generation has been producing industrial generator sets with an innovative compact design and excellence in quality for over 30 years. AKSA has been providing reliable power through three main production plants and over 15 branch offices worldwide.

General Characteristics

Model Name	APD-NG830
Engine Make	PSI (Doosan)
Engine Model	40L
Alternator Make	Stamford
Control Panel Make & Model	DSE 7320
Frequency & Speed	60Hz, 1800rpm
Enclosure Make & Model	AKSA AUL 96A



Genset Rating

Engine	Alternator	Voltage	PF	NG Standby Power	NG Standby Current
40L	HCI634H (Wnd-311)	208/120V	0.8	832.5kW	2888.6A
	HCI634H (Wnd-311)	240/120V	0.8	832.5kW	2503.4A
	HCI634G (Wnd-311)	480/277V	0.8	829.8kW	1251.7A
	HCI634G (Wnd-17)	600/347V	0.8	829.8kW	998.1A

***EPA – Certified for Emergency Stationary Applications**

Stand-by Power (Maximum): Power available at variable load in the event of main power network failure. No over load is permitted.
 Prime Power: Power available at variable load in lieu of a main power network. Overload of 10% is permitted for 1 hour in every 12 hours of operation.
 The above ratings represent the engine performance capabilities to conditions specified in accordance with ISO 8528/5 & ISO3046.
Derating may be required for conditions outside of the test conditions.

Codes & Standards

The Generator set is designed and manufactured in a facility certified to **ISO9001** standards.

The Generator set is designed and manufactured in a facility certified to **ISO14001:2015** standards.

AKSA Power Generation provides **single source responsibility** for the generator set & accessories.

The generator set, with its components, are **prototype tested** and **production tested** according to the UL test program.

The generator set meets **NFPA70, 99, 110, 37** Level 1 when equipped with the necessary accessories and installed per NFPA standards.



*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.



Engine Data

Manufacturer	PSI
Model	NG40L
Displacement & Cylinders	39.2 L / 12 Cylinders
Engine Type	V-type, 4 Cycle
Engine Speed	1800rpm
Engine Standby Power NG	920kWm
Engine Standby Power LP	584kW
Aspiration	Turbo Charge Air Cooled
Compression Ratio	10.5 : 1
Bore / Stroke	150 mm / 185 mm
Governor type	Electronic

Fuel System

Fuel Type	NG, LP Gas/Dual Fuel
NG Supply pipe size	3.0" NPTF
Maximum EPR Rated Pressure	N/A
Recommended Max Pressure	2.7 kPa / 11.0 inH ₂ O
Recommended Min Pressure	1.7 kPa / 7.0 inH ₂ O
Max LPG vapor Pressure to EPR	2.7 kPa / 11.0 inH ₂ O

Fuel Consumption

	Natural Gas	LP Gas
Standby Power (100%)	10109 ft ³ /h 286 m ³ /h	83 gal/h 313 L/h
Standby Power (75%)	7503 ft ³ /h 212 m ³ /h	62 gal/h 236 L/h
Standby Power (50%)	5410 ft ³ /h 153 m ³ /h	43 gal/h 165 L/h

Electric System

System Voltage (dc)	24V
Battery Qty, Rating	2 x 143Ah

Cooling System

Radiator Cooling System Type	Closed Circuit
Coolant Capacity	172 gal
Cranking Temperature	160 °F
Full Open Temperature	198 °F

Exhaust System

Type	Water cooled manifold
Max. allowable back pressure	13 kPa
Turbine Outlet Temperature	1238 °F / 670 °C
Exhaust Gas Flow at Rated Power	4920 cfm

Air Intake System

Combustion Air Required	1591 cfm
Max Intake Air Restriction (Clean Element)	1.3 kPa / 5.2inH ₂ O
Air Filter Type	Dry Paper Element

Lubrication System

Oil Specifications	SAE 15W-40 Low Ash Gas Engine oil, API CD/CF or higher
Oil Capacity, Min-Max	127 – 154 Qts
Oil filter; qt, type	2, Cartridge
Min – Max Oil Pressure at Rated Speed	47psi – 57 psi 3,24 bar – 3,93 bar



Alternator Data

Manufacturer	Stamford
Standards	BS EN 60034
Control System	PMG
A.V.R.	MX321
Voltage Regulation	± 0.5 %
Insulation System	Class H
Protection	IP23
Rated Power Factor	0.8
Stator Winding	Double Layer Concentric
Winding Pitch	Two Thirds
Winding Leads	6
Telephone Interference	THF < 2 %
Waveform Distortion	No Load < 1.5 %
Maximum Over speed	2250 rev/min

Battery Charger & Electrical System Data

Manufacturer	ComAp
Model	InteliCharger
Input Voltage	85V ~ 264V AC
Output Voltage / Current	13.8V Float / 4A pk

Jacket Water Heater Data

Manufacturer	Hotstart
Model	CTM25110-No0
Input Voltage	120V
Power	2500W

Controller Data

Manufacturer	DSE
Model	7320 MK II

Controller Features & Benefits

Microprocessor controlled, UL & NFPA110 Compatible
 License free PC Software (Non-proprietary Software)
 IP65 rating offers increased resistance to water ingress
 Modules can be integrated to building management systems
 Real time clock provides accurate event log
 Four line back-lit LCD text display
 Five key menu navigation, two wire start/stop at Auto mode
 Front panel editing with PIN protection
 Support up to three remote display modules
 Configurable timers and alarms
 Multiple date and timer scheduler
 Integral PLC editor
 'Protections disabled' feature
 Load switching (load shedding and dummy load outputs)
 Fully configurable via DSE Configuration Suite PC Software
 SCADA monitoring via DSE Configuration Suite PC Software

Protection

- ✓ Gen. Voltage – under / over
- ✓ Gen. Freq. – under / over
- ✓ Engine Speed – under / over
- ✓ Engine Oil Pressure – low
- ✓ Engine Temp – low / high
- ✓ Battery Voltage – low / high
- ✓ Weak Battery
- ✓ Fail to Start / Stop
- ✓ Charge Alternator Fail
- ✓ Over Current & Load (kW/kVAr)
- ✓ Unbalanced Load
- ✓ Independent Earth Fault
- ✓ Reverse Power
- ✓ Loss of Speed Signal

Instruments

- ✓ Gen. Voltage (L-L/L-N)
- ✓ Gen. Frequency
- ✓ Engine speed
- ✓ Oil Pressure
- ✓ Water Temperature
- ✓ Battery Voltage
- ✓ Run Time
- ✓ Phase Sequence
- ✓ Power monitoring (kWh/kVAh/kVArh)
- ✓ Power (kWh/kVAh/kVArh)
- ✓ Power Factor
- ✓ Generator Current
- ✓ Generator Load (%)
- ✓ Earth Current



Enclosure Features



- ✓ Heavy Duty Steel / Aluminum Structure
- ✓ E-Stop on Enclosure
- ✓ Control Panel Eliminated from Engine Vibrations
- ✓ Standard Sound Attenuation Foam
- ✓ Plastic Covered Corrosion Resistant Locks & Hinges

Enclosure Features

- ✓ Internally Mounted Exhaust System with Rain Cap
- ✓ Coolant Fill Cap
- ✓ Removable Base Frame Lifting Hooks
- ✓ Oil & Coolant Drain Ports
- ✓ Easy Access for Maintenance



Open Skid Gen-Set Dimensions

Length	185.43 in
Width	68.89 in
Height	99.60 in
Dry Weight	23655 lb

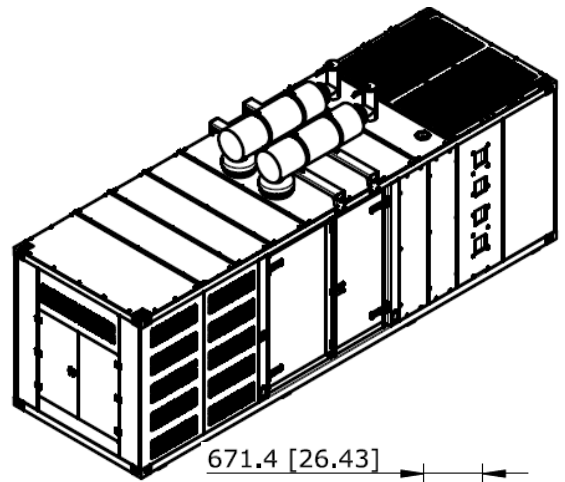

Enclosed Gen-Set Dimensions – Level 1

Length	295.47 in
Width w/o lift hooks	91.61 in
Height w/o Silencer	98.8 in
Height with Silencer	129.3 in
Dry Weight	15000 lb
Sound Pressure @ 7 meters	80 dBA

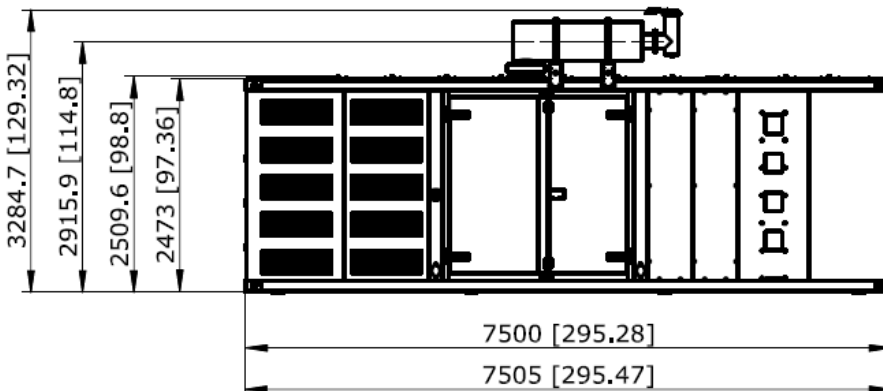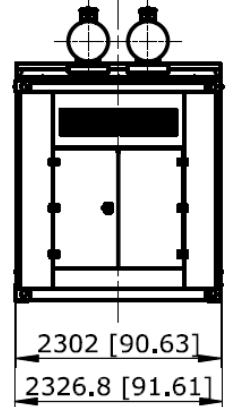

*Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.



Standard Features & Accessories

- ✓ UL2200 Certification
- ✓ Heavy Duty Steel Base Frame
- ✓ PMG
- ✓ Engine Jacket Water Heater
- ✓ Battery and Battery Rack
- ✓ Battery Charger
- ✓ Anti Vibration Pads between Engine/Alternator & Base Frame
- ✓ Roof-mounted Critical Grade Silencer
- ✓ Residential Grade Silencer Set for Open Skid Sets
- ✓ Exhaust outlet rain cap and radiator fill cap
- ✓ Sound Absorb Foam Material for Enclosure
- ✓ Emergency Stop Button
- ✓ Oil Drain Valve
- ✓ Coolant Drain Valve
- ✓ Jacket Water Heater Isolation Valves
- ✓ Flex Fuel Lines
- ✓ Secondary Lock-off Valve on Baseframe
- ✓ Engine Manifold Cover
- ✓ Turbocharger Cover
- ✓ Protection Covers for Rotating Parts
- ✓ Exhaust Insulation Cover
- ✓ Enclosure DC Light
- ✓ Operations Manual
- ✓ 24 Months / 2000 hours Limited Standby Warranty

Optional Accessories

- Main Line CB (3 / 4 Poles – 80% / 100% rated)
- Upsize Alternator
- Anti-condensation Heater
- Voltage Regulation $\pm 0.5\%$ w/MX321 AVR
- Gas Regulator
- NG / LP Auto Changeover Control System
- Low Gas Pressure Alarm
- Low Coolant Level Alarm
- Oil Pan Heater
- Oil Temperature Display on Controller
- Manual Speed Adjust Rheostat
- Manual Voltage Adjust Rheostat
- Remote Annunciator Panel
- Remote Control & Monitoring Panel
- Advanced SMS Messaging
- Control Panel Heater
- Battery Disconnect Switch
- Battery Heater
- Battery Charger 10/20 Amp
- Shunt Trip / Aux Contacts
- Spring Anti-vibration Isolators
- Automatic Transfer Panel (ATS)
- 5 Years / 2000 hours Limited Comprehensive Warranty

AKSA POWER GENERATION USA LLC

371 Exchange Street, West Monroe,
Louisiana, 71292

Tel: 318.855.8377 Fax: 318.855.8381

E-mail: sales@aksausa.com

AKSA Power Generation USA is a member of

**KAZANCI HOLDING****DISTRIBUTED BY:**